



Service Bulletin

Bulletin No.: **SB-0046**

Date: 07/26/06

Beamer Luggage box installation

FIG #1



- 1st check the contents of package
- 1-Luggage box
 - 1-Set of keys
 - 1-Mounting plate
 - 1-Luggage box pad
 - 4-Mounting brackets
 - 4-Bolts
 - 4-Washers
 - 4-Nuts

FIG #3

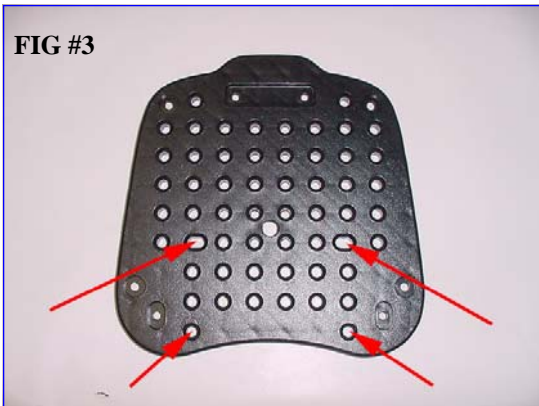


FIG #2



The mounting plate is positioned on the bottom of the luggage box with the smooth side toward the box. The (4) bolts and washers are pushed through the box and plate from inside the box using the holes indicated in Fig #3.

Place the box and plate over the rear rack and attach using the (4) brackets, washers and nuts supplied. See Fig #4.

FIG #4





ETON America, LLC




Service Bulletin

Bulletin No.: SB-0046

Date: 07/26/06

Beamer Luggage box installation

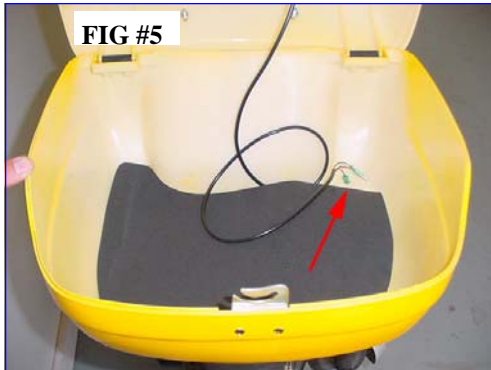


Once the luggage box is installed push the rear brake light LED wires through the hole in the box as shown in Fig #5 and install the luggage box pad.



The wires for the LED hookup are located on the rear of the bike around the rear taillight. They may be tucked in under the harness on the left hand side of the unit..

Note: ONLY the Beamer II & III and the Matrix & Matrix II have been pre wired for the luggage box brake light.

If you have the older model Beamer the LED will have to be hard wired into the rear taillight.

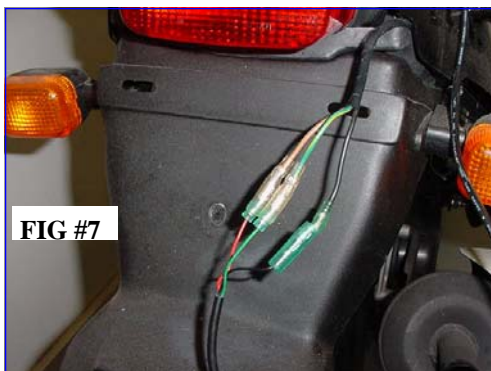

Connect the wires from the LED light to the main harness using the following wiring table.:

Box Wires	Main Harness
Red	Brown
Green	Green
Black	Black